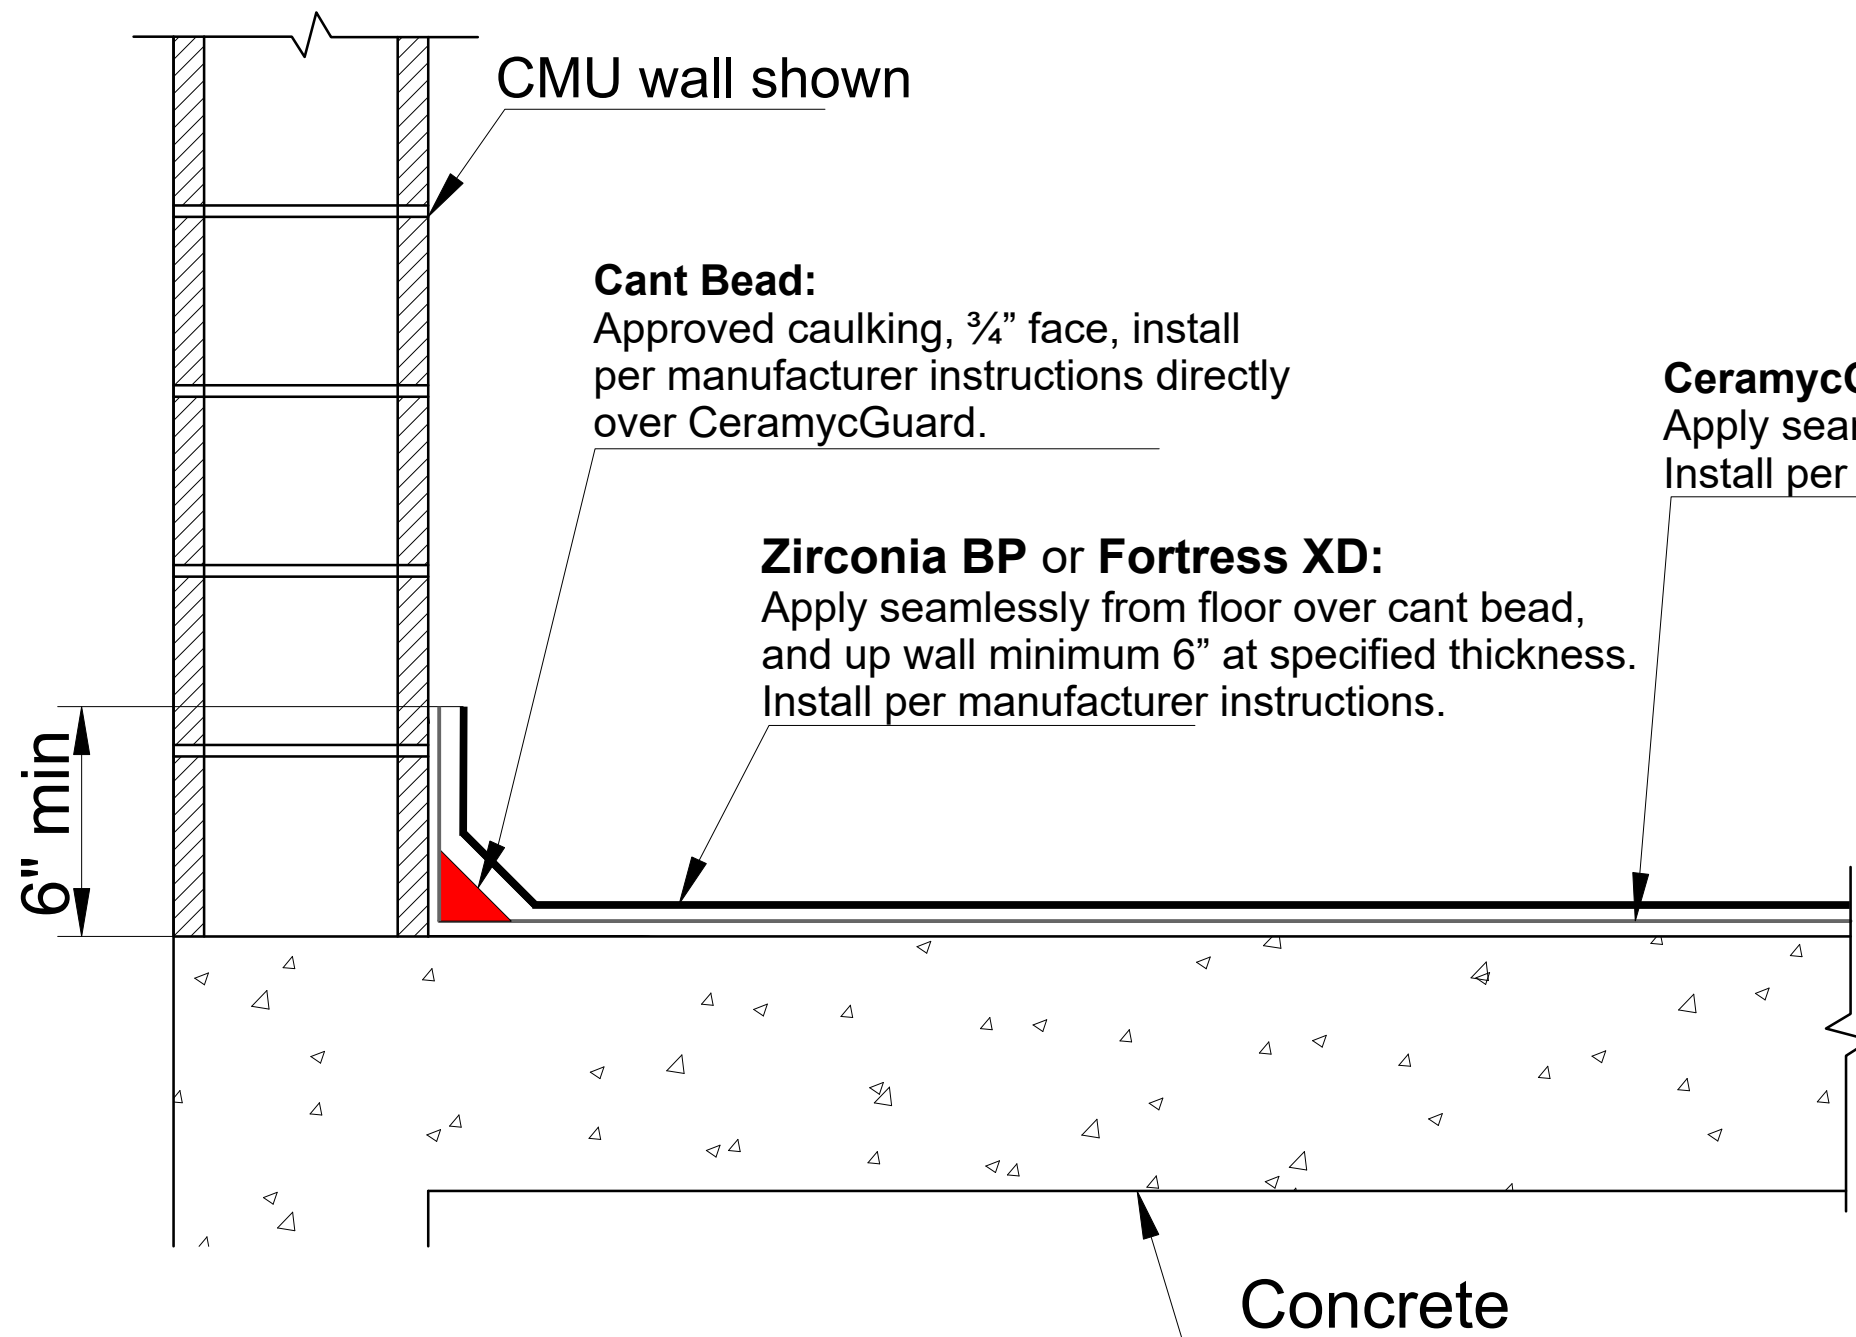# Flashing Detail, Concrete or CMU Wall

Note:
See attached list of approved caulks for cant bead installation.

CeramycGuard effectively bonds to and seals both concrete and CMU.

CMU wall shown

Cant Bead:
Approved caulking, ¾" face, install per manufacturer instructions directly over CeramycGuard.

CeramycGuard:
Apply seamlessly from floor up wall minimum 6". Install per manufacturer instructions.

Zirconia BP or **Fortress XD:**
Apply seamlessly from floor over cant bead, and up wall minimum 6" at specified thickness. Install per manufacturer instructions.

6" min

Concrete

Approved Cant Bead Caulks:

1. Dymonic 100